




AC FAN


120x120x38mm



◆ DIMENSIONS DRAWING

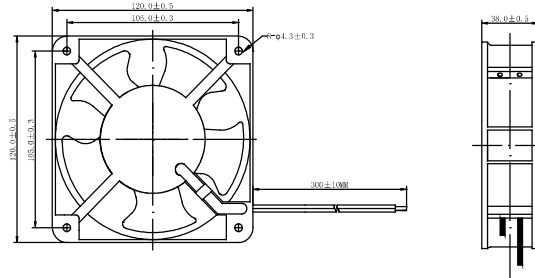

◆ P&Q CURVE(AT RATED VOLTAGE)

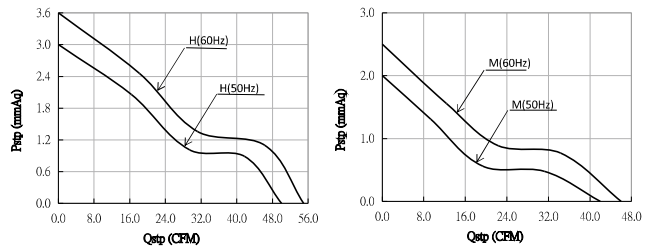

◆ AVAILABLE FUNCTIONS

1. Motor protection

AS

2. Signal out put

FG

RD

3. Speed control mode

PWM

TC




Model	Bearing	Rated Voltage	Voltage Range	Freq.	Current	Speed	Air Flow	Static Pressure	Noise		
Part NO.	System	VAC	VAC	Hz	A	RPM	M ³ /min	CFM	mmH ₂ O	INH ₂ O	dB(A)
MF12123801	Ball	220	200-240	50/60	0,14/0,12	2500/2700	1,42/1,56	50/55	3,0/3,6	0,12/0,14	42/44

DC AXIAL FAN


120x120x38mm



◆ DIMENSIONS DRAWING

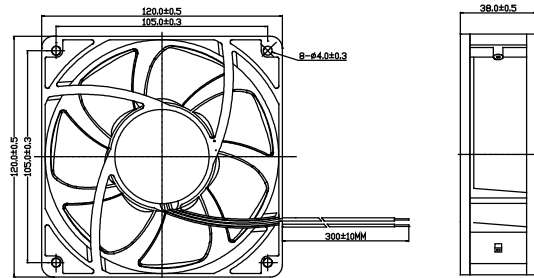

◆ P&Q CURVE(AT RATED VOLTAGE)

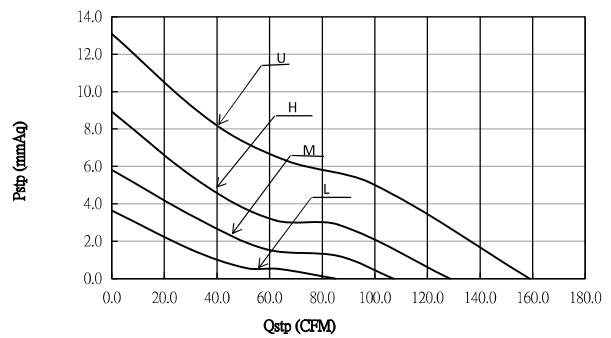

◆ AVAILABLE FUNCTIONS

1. Motor protection

AS

2. Signal out put

FG

RD

3. Speed control mode

PWM

TC



Model	Bearing	Rated Voltage	Startup Voltage	Current	Power	Speed	Air Flow	Static Pressure	Noise			
Part NO.	Function	System	VDC	VDC	A	W	RPM	M ³ /min	CFM	mmH ₂ O	INH ₂ O	dBA
MF12123802	-	BALL	12	5,0	0,80	9,6	3500	4,50	158,90	13,10	0,52	52,5
MF12123803	-	BALL	24	12,0	0,60	14,40	3500	4,50	158,90	13,10	0,52	52,5
MF12123804	-	BALL	48	24,0	0,25	12,00	3500	4,50	158,90	13,10	0,52	52,5