



# Absorber & Fittings

**refnox**

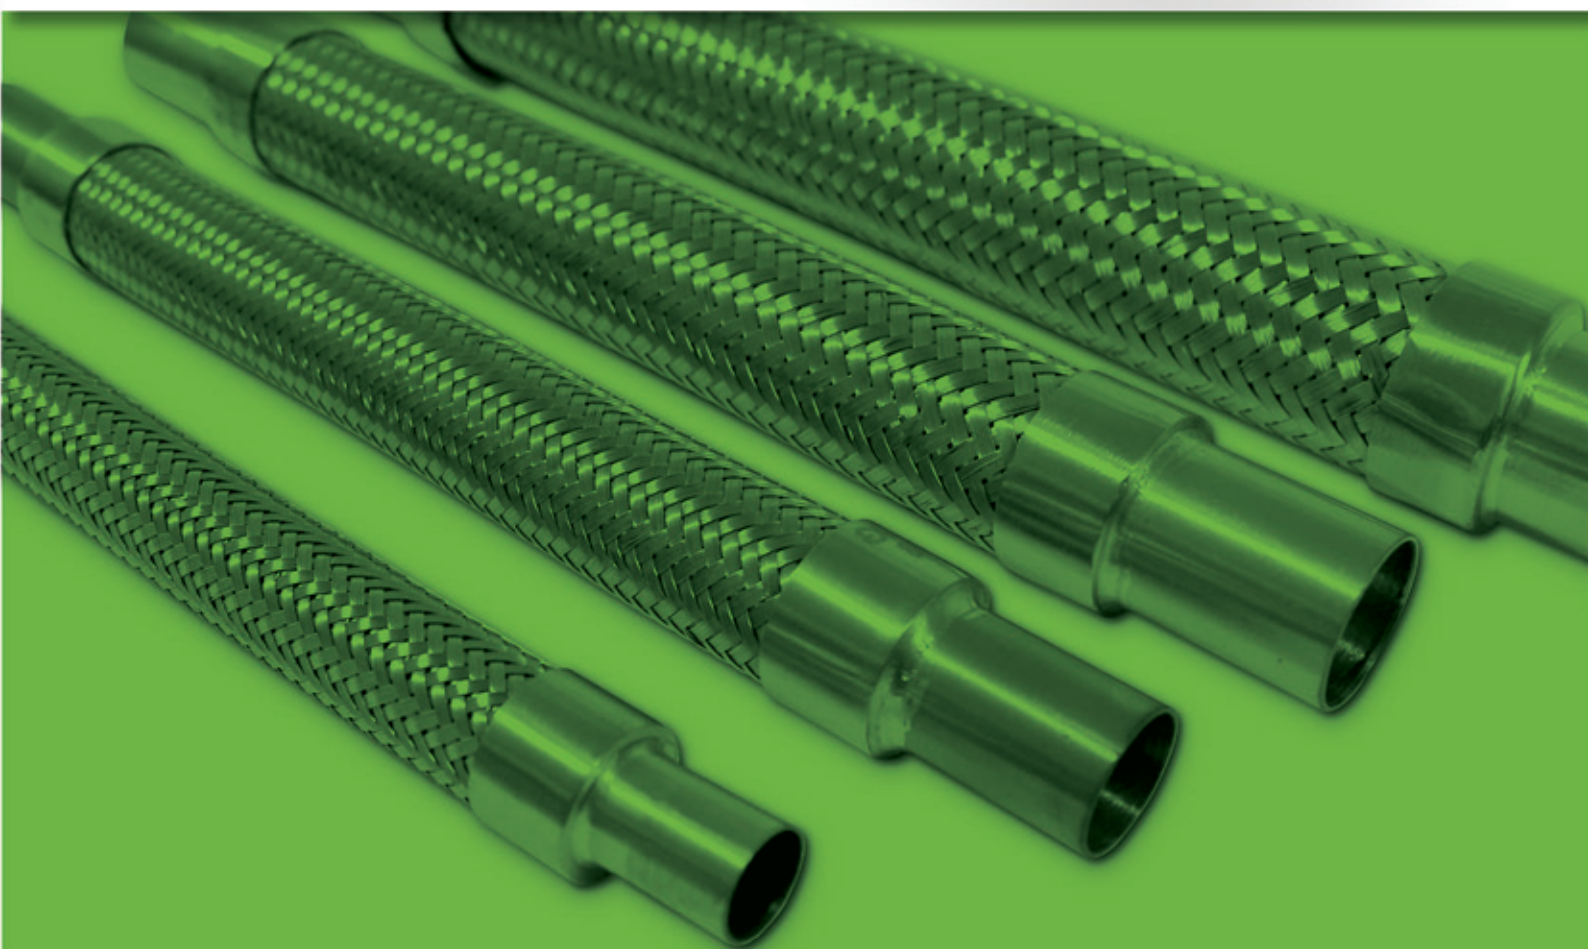

## Vibration Absorbers

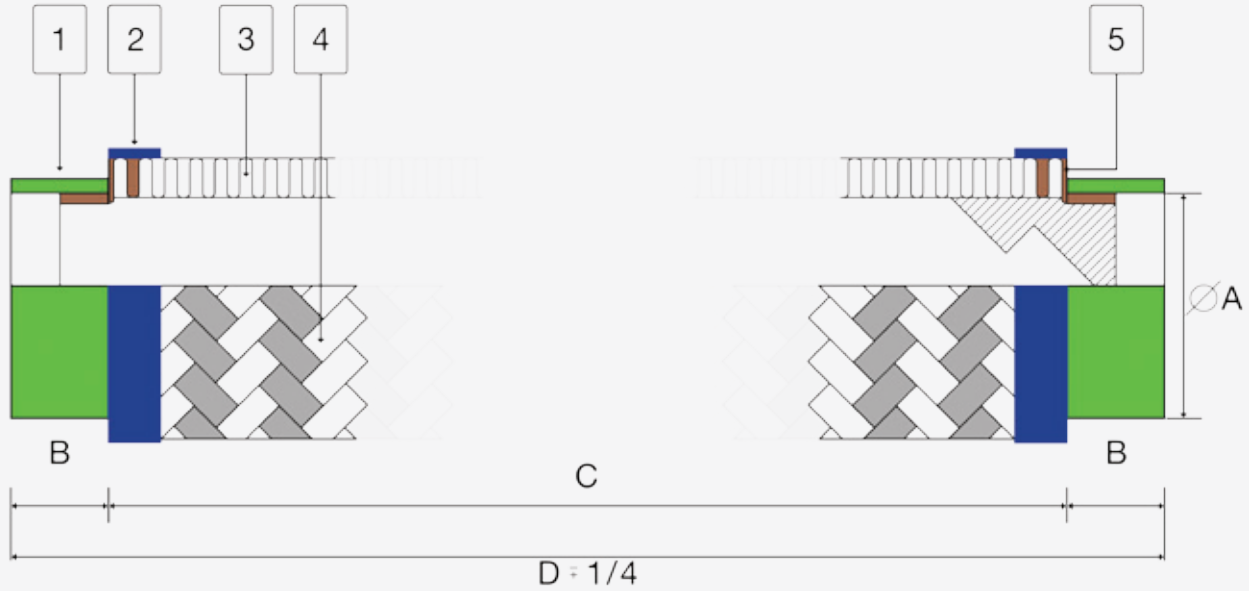

1:Tube End    2:Ferrule    3:Flexible    4:Wire    5:Brazed Joint

Code Nr.	Model	Connection Size (inch)	Working Pressure	Testing Pressure	Dimensions (inch)			
					A	B	C	D
026AK1000	RVA-SF-0	1/4"	35Kg t/cm <sup>2</sup>	125Kg t/cm <sup>2</sup>	1/4"	1/2"	6-1/2"	7-7/8"
026AK1001	RVA-SF-1	3/8"			3/8"	3/4"	7"	8-1/2"
026AK1002	RVA-SF-2	1/2"			1/2"	7/8"	7-1/4"	9"
026AK1003	RVA-SF-3	5/8"			5/8"	1-5/16"	8"	9-7/8"
026AK1004	RVA-SF-4	3/4"			3/4"	1-1/4"	8-1/16"	10-1/2"
026AK1005	RVA-SF-5	7/8"			7/8"	1-3/8"	9-1/4"	12"
026AK1006	RVA-SF-6	1-1/8"			1-1/8"	1-3/4"	9-7/16"	13"
026AK1007	RVA-SF-7	1-3/8"			1-3/8"	2-1/16"	11-7/16"	15-1/2"
026AK1008	RVA-SF-8	1-5/8"			1-5/8"	2-1/4"	12-3/8"	16-15/16"
026AK1009	RVA-SF-9	2-1/8"	30Kg t/cm <sup>2</sup>	100Kg t/cm <sup>2</sup>	2-1/8"	2-11/16"	15-3/16"	20-1/2"
026AK1010	RVA-SF-10	2-5/8"	25Kg t/cm <sup>2</sup>	80Kg t/cm <sup>2</sup>	2-5/8"	3-1/16"	18	24-1/8"
026AK1011	RVA-SF-11	3-1/8"	20Kg t/cm <sup>2</sup>		3-1/8"	3-7/16"	20	26-15/16"
026AK1012	RVA-SF-12	3-5/8"	15Kg t/cm <sup>2</sup>	70Kg t/cm <sup>2</sup>	3-5/8"	4-1/16"	24	32-1/8"
026AK1013	RVA-SF-13	4-1/8"			4-1/8"	4-1/2"	24	33

## Copper Fittings

							
Standard Elbow 90 C	Long Elbow 90 C	TEE	Reducing TEE	Coupling	Reducing	P Trap	Cap
1/4"	1/4"	1/4"	5/8"x7/8"x5/8"	1/4"	22 X 16	5/8"	1/2"
3/8"	3/8"	3/8"	3/4"x7/8"x3/4"	3/8"	28 X 16	3/4"	5/8"
1/2"	1/2"	1/2"	7/8"x5/8"x7/8"	1/2"	28 X 22	7/8"	3/4"
5/8"	5/8"	5/8"	7/8"x1-1/8"x7/8"	5/8"	35 X 22	1 – 1/8"	7/8"
3/4"	3/4"	3/4"	1-1/8"x7/8"x1-1/8"	3/4"	35 X 28	1 – 3/8"	1 – 1/8"
7/8"	7/8"	7/8"	2-1/8"x1-3/8"	7/8"	42 X 22	–	1 – 3/8"
1 – 1/8"	1 – 1/8"	1 – 1/8"	–	1 – 1/8"	42 X 28	–	1 – 5/8"
1 – 3/8"	1 – 3/8"	1 – 3/8"	–	1 – 3/8"	42 X 35	–	–
1 – 5/8"	1 – 5/8"	1 – 5/8"	–	1 – 5/8"	54 X 35	–	–
2 – 1/8"	2 – 1/8"	2 – 1/8"	–	2 – 1/8"	54 X 42	–	–
2 – 5/8"	2 – 5/8"	2 – 5/8"	–	2 – 5/8"	67 X 54	–	–
3 – 1/8"	3 – 1/8"	3 – 1/8"	–	–	76 X 54	–	–
108 mm	108 mm	108 mm	–	–	76 X 67	–	–
Access Valve without Copper Tube			1/4"				
Access Valve with Copper Tube			1/4"	Tube Thickness	0,35 mm	Tube Length	100 mm
Copper Cappillary Tube with Nuts				Tube	1/8" inch	Tube Length	900 mm